


**DIMENSIONS APPEAR AS INCHES (mm).
TOLERANCES APPLY TO DIMENSIONS IN
INCHES**

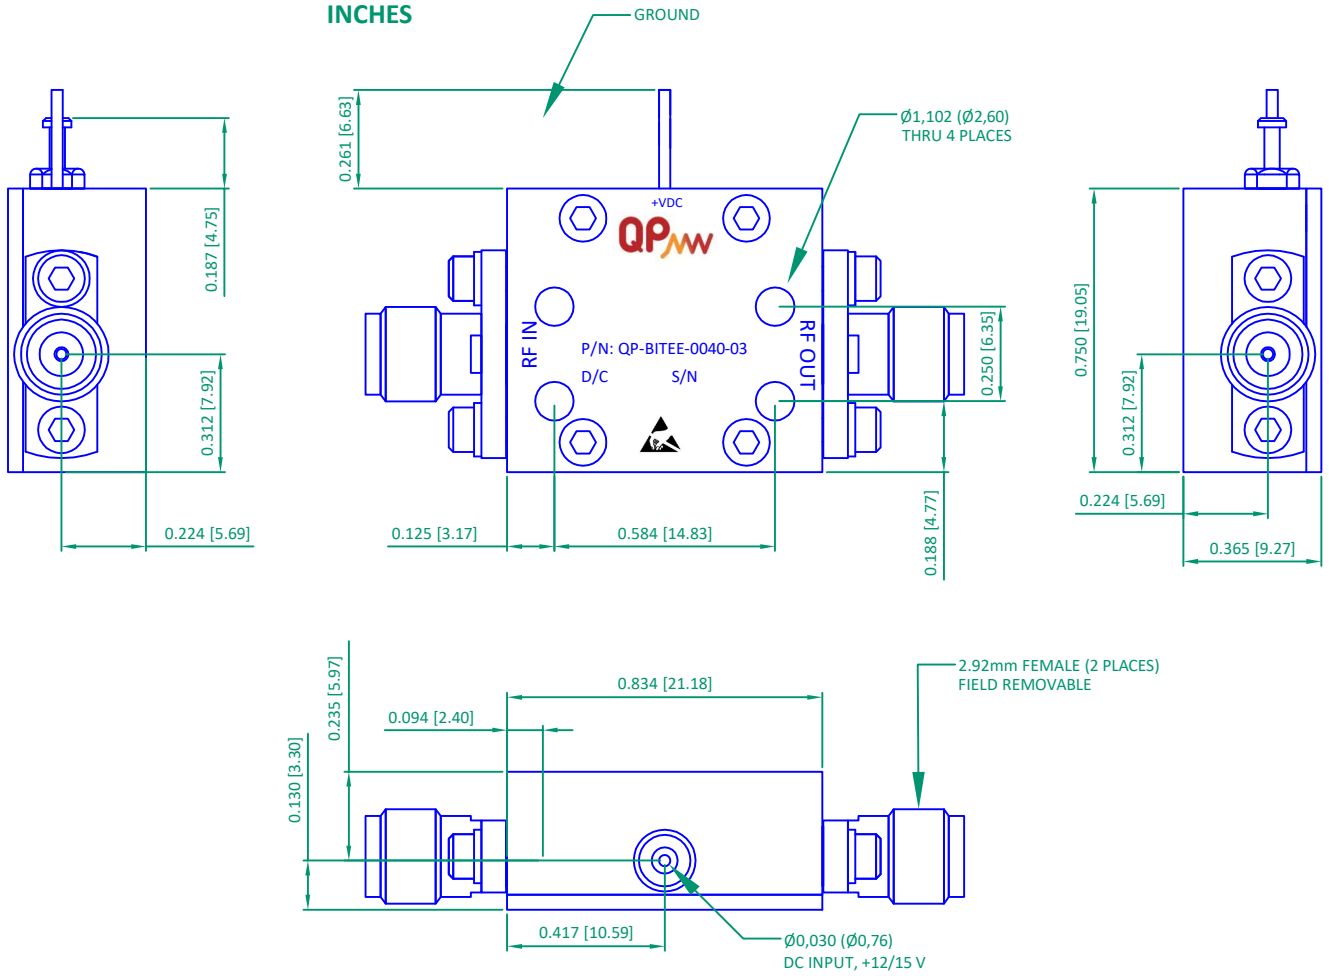

ELECTRICAL SPECIFICATIONS:


FREQUENCY RANGE: 500 MHz - 40 GHz
 INSERTION LOSS: 1.5 dB TYP.
 1.8 dB MAX.
 VSWR: 1.6:1 TYP.
 2.0:1 MAX.
 DC VOLTAGE: 50 V MAX.
 DC CURRENT: 1000 mA MAX.

ENVIRONMENTAL RATINGS

- TEMPERATURE: -40°C TO +85°C (OPERATING)
 -55°C TO +125°C (STORAGE)
 - HUMIDITY: MIL-STD-202G, METHOD 103B COND. B
 - SHOCK: MIL-STD-202G, METHOD 213B COND. B
 - VIBRATION: MIL-STD-202G, METHOD 204D COND. B
 - ALTITUDE: MIL-STD-202G, METHOD 105C COND. B
 - TEMP. SHOCK: MIL-STD-202G, METHOD 107G COND. A



NOTE: The above specifications are subject to change or revision. Specifications are at 25°C unless stated otherwise.

	QP microWAVE CÓLQUIDE 6 28231 LAS ROZAS MADRID, SPAIN	APPROVALS	DATE	SIGNED	DESCRIPTION: BIAS TEE 500 MHz - 40 GHz	REV.:	SHEET:
		DRAW	03/07/20	CRU	QP-BITEE-0040-03	005	1 OF 1
		CHECKED	03/07/20	BME			
		APPROVED	03/07/20	JAV			