


SMA FEMALE

SMA MALE

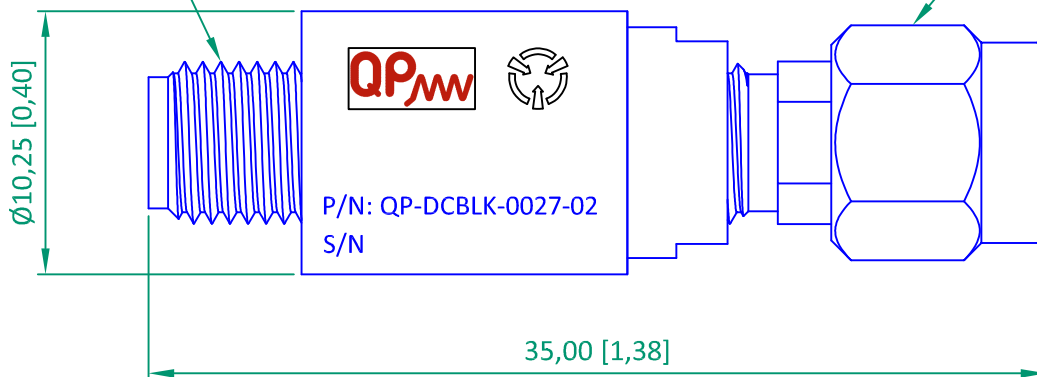

**ALL DIMENSIONS SHOWN
ARE IN mm [inch]**

ELECTRICAL SPECIFICATIONS:


FREQUENCY RANGE: 10 MHz - 27 GHz
INSERTION LOSS: 1 dB TYP.
1.5 dB MAX.
VSWR: 1.2:1 TYP.
1.5:1 MAX.
DC VOLTAGE: 50 V
POWER HANDLING: +30dBm CW

ENVIRONMENTAL RATINGS

- TEMPERATURE: -40°C TO +85°C (OPERATING)
-55°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202G, METHOD 103B COND. B
- SHOCK: MIL-STD-202G, METHOD 213B COND. B
- VIBRATION: MIL-STD-202G, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202G, METHOD 105C COND. B
- TEMP. SHOCK: MIL-STD-202G, METHOD 107G COND. A



NOTE: The above specifications are subject to change or revision. Specifications are at 25°C unless stated otherwise

	QP microWAVE CÓLQUIDE 6 28231 LAS ROZAS MADRID, SPAIN	APPROVALS	DATE	SIGNED	DESCRIPTION: DC BLOCK 10 MHz - 27 GHz		
		DRAW	13/02/19	STO	CODE:	REV.:	SHEET:
		CHECKED	13/02/19	BME	QP-DCBLK-0027-02	003	1 OF 1
		APPROVED	13/02/19	JAV			