
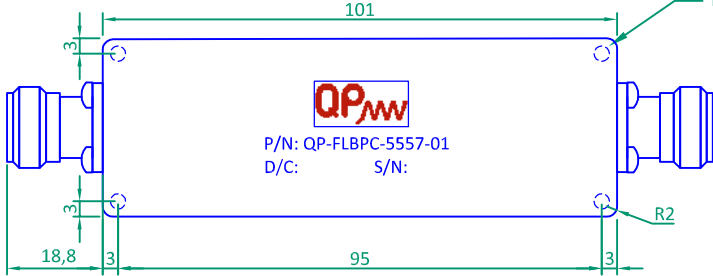



	1	2	3	4																							
A					A																						
B				B																							
C				C																							
D	ELECTRICAL SPECIFICATIONS: <table><tr><td>FILTER TYPE:</td><td>CAVITY</td></tr><tr><td>FREQUENCY RANGE:</td><td>5490-5690 MHz</td></tr><tr><td>CENTRAL FREQUENCY:</td><td>5590 MHz</td></tr><tr><td>3dB BANDWIDTH:</td><td>200 MHz</td></tr><tr><td>BAND PASS INSERTION LOSS:</td><td>1.5 dB max.</td></tr><tr><td>BAND PASS RETURN LOSS:</td><td>15 dB min.</td></tr><tr><td>STOP BAND ATTENUATION:</td><td>12 dB min. @ DC-5440 MHz</td></tr><tr><td></td><td>12 dB min. @ 5740-10000 MHz</td></tr><tr><td>POWER HANDLING :</td><td>0.126 W max.</td></tr><tr><td>IN/OUT IMPEDANCE:</td><td>50 Ohm</td></tr><tr><td>IN/OUT CONNECTORS:</td><td>N (F)</td></tr></table>				FILTER TYPE:	CAVITY	FREQUENCY RANGE:	5490-5690 MHz	CENTRAL FREQUENCY:	5590 MHz	3dB BANDWIDTH:	200 MHz	BAND PASS INSERTION LOSS:	1.5 dB max.	BAND PASS RETURN LOSS:	15 dB min.	STOP BAND ATTENUATION:	12 dB min. @ DC-5440 MHz		12 dB min. @ 5740-10000 MHz	POWER HANDLING :	0.126 W max.	IN/OUT IMPEDANCE:	50 Ohm	IN/OUT CONNECTORS:	N (F)	D
FILTER TYPE:	CAVITY																										
FREQUENCY RANGE:	5490-5690 MHz																										
CENTRAL FREQUENCY:	5590 MHz																										
3dB BANDWIDTH:	200 MHz																										
BAND PASS INSERTION LOSS:	1.5 dB max.																										
BAND PASS RETURN LOSS:	15 dB min.																										
STOP BAND ATTENUATION:	12 dB min. @ DC-5440 MHz																										
	12 dB min. @ 5740-10000 MHz																										
POWER HANDLING :	0.126 W max.																										
IN/OUT IMPEDANCE:	50 Ohm																										
IN/OUT CONNECTORS:	N (F)																										
E	ENVIRONMENTAL RATINGS - TEMPERATURE: -20°C TO +65°C (OPERATING) 				E																						
F	<i>NOTE: The above specifications are subject to change or revision. Specifications are at 25°C unless stated otherwise.</i> <table><tr><td rowspan="4"></td><td rowspan="4">QP microWAVE CÓLQUIDE 6 28231 LAS ROZAS MADRID, SPAIN</td><td>APPROVALS</td><td>DATE</td><td>SIGNED</td><td colspan="3">DESCRIPTION: BAND PASS FILTER FOR 5.49-5.69 GHz</td></tr><tr><td>DRAW</td><td>06/06/17</td><td>BME</td><td rowspan="3">CODE: QP-FLBPC-5557-01</td><td>REV.:</td><td>SHEET:</td></tr><tr><td>CHECKED</td><td>06/06/17</td><td>JAV</td><td rowspan="2">001</td><td rowspan="2">1 DE 1</td></tr><tr><td>APPROVED</td><td>06/06/17</td><td>JAV</td></tr></table>					QP microWAVE CÓLQUIDE 6 28231 LAS ROZAS MADRID, SPAIN	APPROVALS	DATE	SIGNED	DESCRIPTION: BAND PASS FILTER FOR 5.49-5.69 GHz			DRAW	06/06/17	BME	CODE: QP-FLBPC-5557-01	REV.:	SHEET:	CHECKED	06/06/17	JAV	001	1 DE 1	APPROVED	06/06/17	JAV	F
	QP microWAVE CÓLQUIDE 6 28231 LAS ROZAS MADRID, SPAIN	APPROVALS	DATE	SIGNED			DESCRIPTION: BAND PASS FILTER FOR 5.49-5.69 GHz																				
		DRAW	06/06/17	BME			CODE: QP-FLBPC-5557-01	REV.:	SHEET:																		
		CHECKED	06/06/17	JAV				001	1 DE 1																		
		APPROVED	06/06/17	JAV																							
	1	2	3	4																							