

1


2

3


4

A

A

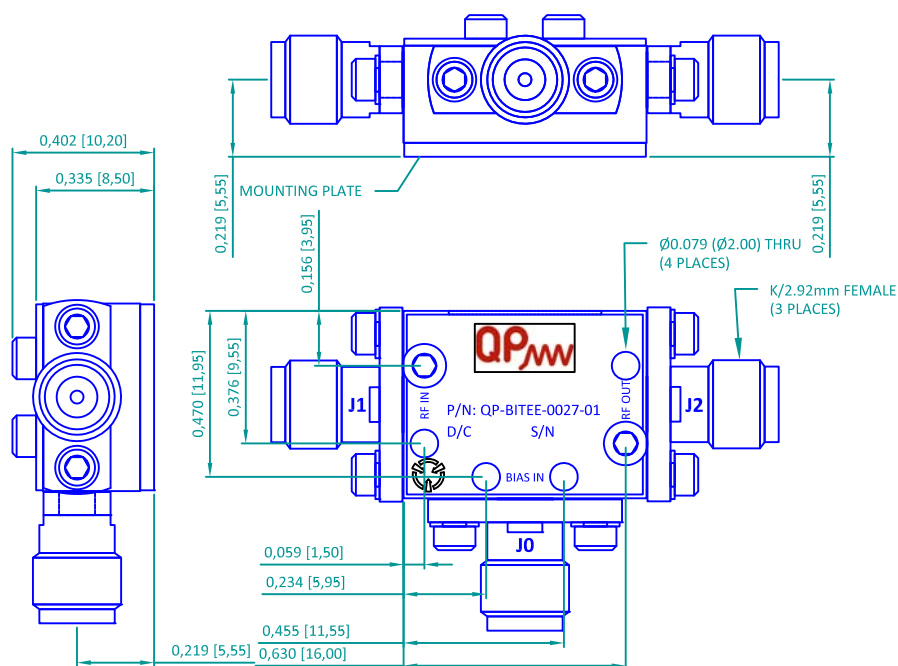

**DIMENSIONS APPEAR
AS INCHES (mm).
TOLERANCES APPLY
TO DIMENSIONS IN
INCHES**

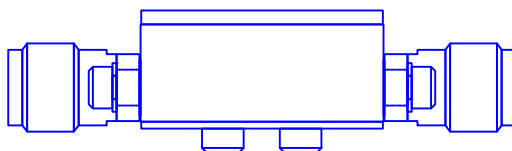

B

B

C

C

ELECTRICAL SPECIFICATIONS:

FREQUENCY RANGE:	10 MHz - 27 GHz
INSERTION LOSS:	1.3 dB TYP. 1.6 dB MAX.
VSWR:	1.5:1 TYP. 1.8:1 MAX.
DC VOLTAGE:	16 V MAX.
DC CURRENT:	250 mA MAX.

D

D

ENVIRONMENTAL RATINGS

- TEMPERATURE:	-40°C TO +85°C (OPERATING) -55°C TO +125°C (STORAGE)
- HUMIDITY:	MIL-STD-202G, METHOD 103B COND. B
- SHOCK:	MIL-STD-202G, METHOD 213B COND. B
- VIBRATION:	MIL-STD-202G, METHOD 204D COND. B
- ALTITUDE:	MIL-STD-202G, METHOD 105C COND. B
- TEMP. SHOCK:	MIL-STD-202G, METHOD 107G COND. A

E

E



NOTE: The above specifications are subject to change or revision. Specifications are at 25°C unless stated otherwise.

F

F



QP microWAVE
CÓLQUIDE 6
28231 LAS ROZAS
MADRID, SPAIN

APPROVALS	DATE	SIGNED	DESCRIPTION:	REV.:	SHEET:
DRAW	17/01/13	AGM	BIAS TEE 10 MHz - 27 GHz QP-BITEE-0027-01	001	1 OF 1
CHECKED	17/01/13	AGM			
APPROVED					

1

2

3

4