


2.92mm FEMALE

2.92mm FEMALE

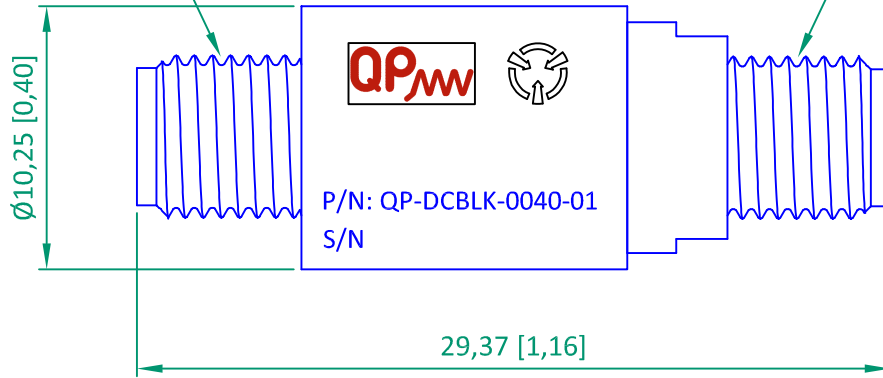

**ALL DIMENSIONS SHOWN  
ARE IN mm [inch]**

**ELECTRICAL SPECIFICATIONS:**

FREQUENCY RANGE: 10 MHz - 40 GHz.  
 INSERTION LOSS: 1.5 dB MAX.  
 VSWR: 1.8:1 TYP.  
 2.0:1 MAX.  
 DC VOLTAGE: 16 V MAX.  
 POWER HANDLING: +30dBm CW.

**ENVIRONMENTAL RATINGS**

- TEMPERATURE: -40°C TO +85°C (OPERATING)  
 -55°C TO +125°C (STORAGE)  
 - HUMIDITY: MIL-STD-202G, METHOD 103B COND. B  
 - SHOCK: MIL-STD-202G, METHOD 213B COND. B  
 - VIBRATION: MIL-STD-202G, METHOD 204D COND. B  
 - ALTITUDE: MIL-STD-202G, METHOD 105C COND. B  
 - TEMP. SHOCK: MIL-STD-202G, METHOD 107G COND. A



NOTE: The above specifications are subject to change or revision. Specifications are at 25°C unless stated otherwise

|  |   |           |          |        |  |       |        |
|--|---|-----------|----------|--------|--|-------|--------|
|  | <b>QP microWAVE</b><br>CÓLQUIDE 6<br>28231 LAS ROZAS<br>MADRID, SPAIN | APPROVALS | DATE     | SIGNED | DESCRIPTION: <b>DC BLOCK 10 MHz - 40 GHz</b> | REV.: | SHEET: |
|  |   | DRAW      | 13/02/19 | STO    | CODE:  | 001   | 1 OF 1 |
|  |   | CHECKED   | 13/02/19 | BME    | <b>QP-DCBLK-0040-01</b>                      |       |        |
|  |   | APPROVED  | 13/02/19 | JAV    |  |       |        |