

1

2

3


4

A

A

SMA FEMALE

SMA FEMALE

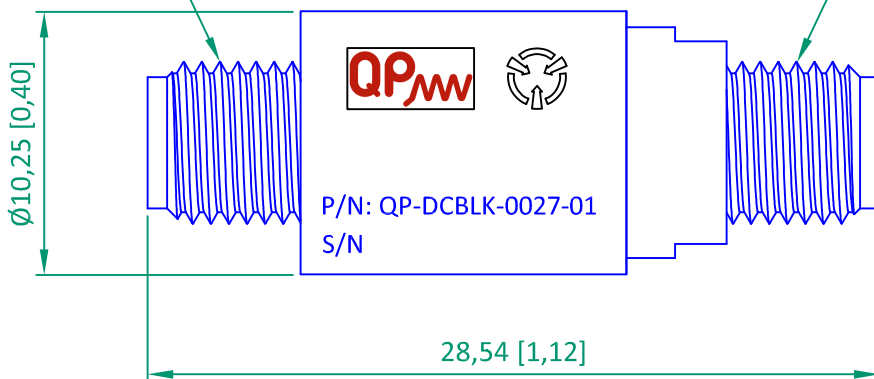

B

B

C

C

**ALL DIMENSIONS SHOWN
ARE IN mm [inch]**

ELECTRICAL SPECIFICATIONS:

FREQUENCY RANGE: 10 MHz - 27 GHz
 INSERTION LOSS: 1 dB TYP.
 1.5 dB MAX.
 VSWR: 1.2:1 TYP.
 1.5:1 MAX.
 DC VOLTAGE: 50 V
 POWER HANDLING: +30dBm CW

ENVIRONMENTAL RATINGS

- TEMPERATURE: -40°C TO +85°C (OPERATING)
 -55°C TO +125°C (STORAGE)
 - HUMIDITY: MIL-STD-202G, METHOD 103B COND. B
 - SHOCK: MIL-STD-202G, METHOD 213B COND. B
 - VIBRATION: MIL-STD-202G, METHOD 204D COND. B
 - ALTITUDE: MIL-STD-202G, METHOD 105C COND. B
 - TEMP. SHOCK: MIL-STD-202G, METHOD 107G COND. A



NOTE: The above specifications are subject to change or revision. Specifications are at 25°C unless stated otherwise

F

F

QP_{mw}

QP microWAVE
 CÓLQUIDE 6
 28231 LAS ROZAS
 MADRID, SPAIN

APPROVALS	DATE	SIGNED	DESCRIPTION:	DC BLOCK 10 MHz - 27 GHz	
DRAW	13/02/19	STO	CODE:	REV.:	SHEET:
CHECKED	13/02/19	BME	QP-DCBLK-0027-01	002	1 OF 1
APPROVED	13/02/19	JAV			

1

2

3

4